A&D Medical

Professional Scales


Barrier-free Scale (for Wheelchairs)

Model : AD-6106R

The AD-6106R is a low, flat scale that can be easily accessed by people using wheelchairs.

General Specifications

- Thin 69 mm scale allows easy access by wheelchairs
- Can be placed upright for storage in a small space
- Side guards ensure safe loading
- 3-way movement for easy passage through narrow aisles and doors
- Easy to get on and off with movable slopes
- Can display measurements in kg
- Tare function
- RS-232C expansion terminal

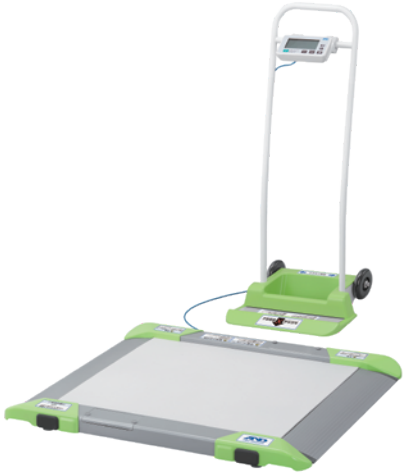

RS-232C Interface


LCD Display

Auto Power Off

Normal Battery

Movable slopes

The ramp goes up and down depending on the weight of the wheelchair.






Reduces burden during transportation and installation

Light and strong “honeycomb design”



*Image is for illustrative purposes only.



3-way movement




Large casters





Wide aisles
normal mode

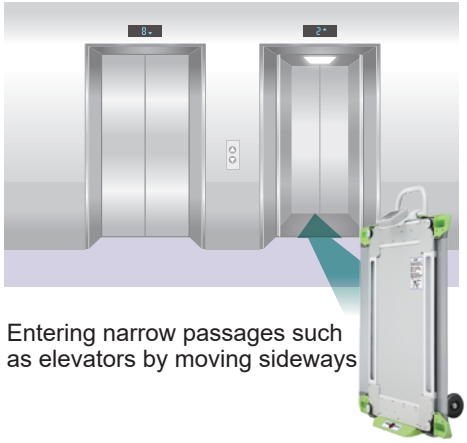

Entering narrow passages such as elevators by moving sideways

Barrier-free Scale (for Wheelchairs) AD-6106R

Technical Specifications

Approval class	III (3)
Capacity	200 kg
Graduation	0.1 kg < 150 kg > 0.2 kg
Measurement Range	2 kg to 200 kg
Power Source	AC Adapter(AX-TB294) / 4 Batteries LR20(D)
Battery Life	Approx. 40 hours (Battery use)
Interface	RC232C (D-SUB 9P)
Dimensions (W) x (D) x (H)	Scales: 845 x 947 x 69-79 mm / Platform: 659 x 704 x 69-79 mm / Stand: 418 x 314 x 961 mm
Weight	17.7 kg (Unit without batteries)

Optional Accessories

Product Code	Option Name
AX-PP147-S	Printer paper(5 pieces/box)
AD-PR580	AD printer unit
AD-PR580-007	Printer installation kit
AS-BLS-120W*	AC Adapter for AD-PR580
AS-ACS-120A*	AC code for AX-BLS-120W

*This is an accessory for the AD-PR580.



Printer paper



AD printer unit

AD Printer Unit (AD-PR580)

Printer installation kit is required for mounting on the stand



Technical Data	
Designated paper	AX-PR147-S W 58 mm x L 29 m
Power supply	AC adapter(AS-BLS-120W)

What is In The Box

- 1 Printer paper
- 1 Slope
- 1 Sticker for AC adapter identification
- 1 Instruction manual
- 1 Warranty

- Please purchase an AC adapter that complies with the standards of your region.
- Ensure that the product complies with the regulatory requirements of the country where it will be used before use.

- Specifications may differ in each country. Please contact an A&D subsidiary for more information.

A&D Medical

A&D Company Limited.(JAPAN)
URL:aandd.jp

A&D ENGINEERING, INC.(USA)
URL:andonline.com

A&D Instruments Canada Inc.(CANADA)
URL:autocontrol.com

A&D INSTRUMENTS LIMITED(United Kingdom)
URL:andprecision.com

A&D AUSTRALASIA PTY LTD(Australia)
URL:andaustralasia.com.au

A&D RUS CO., LTD.(Russia)
URL:and-rus.ru

A&D Technology Trading(Shanghai)Co., Ltd(China)
URL:aanddtech.cn

A&D INSTRUMENTS INDIA PRIVATE LIMITED(India)
URL:aanddindia.in

*AD6106R-ADCC-01-AD02-26700